Notes: Material: Single sided 0.01 inch thick copper clad FR4.
2. Corners should be rounded.
3. Pads should be tin plated and thermal relieved to facilitate soldering.
4. See data sheets for additional information.

Flex cable Backing AVX Series
24-5087-050-907-829 (Hybrid Side)

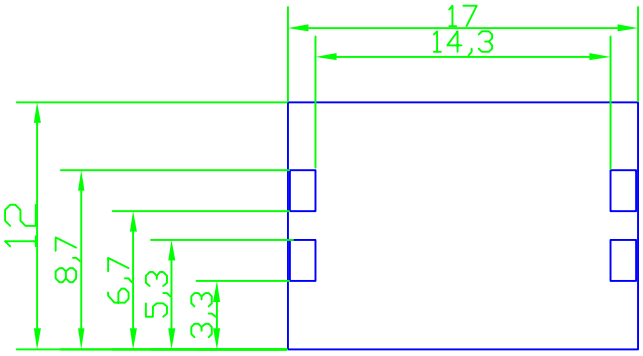
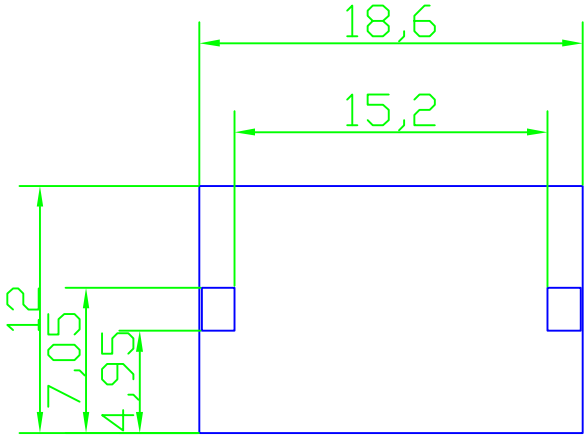
Flex cable Backing-AVX Series
14-5046-050-630-829 (JC side)