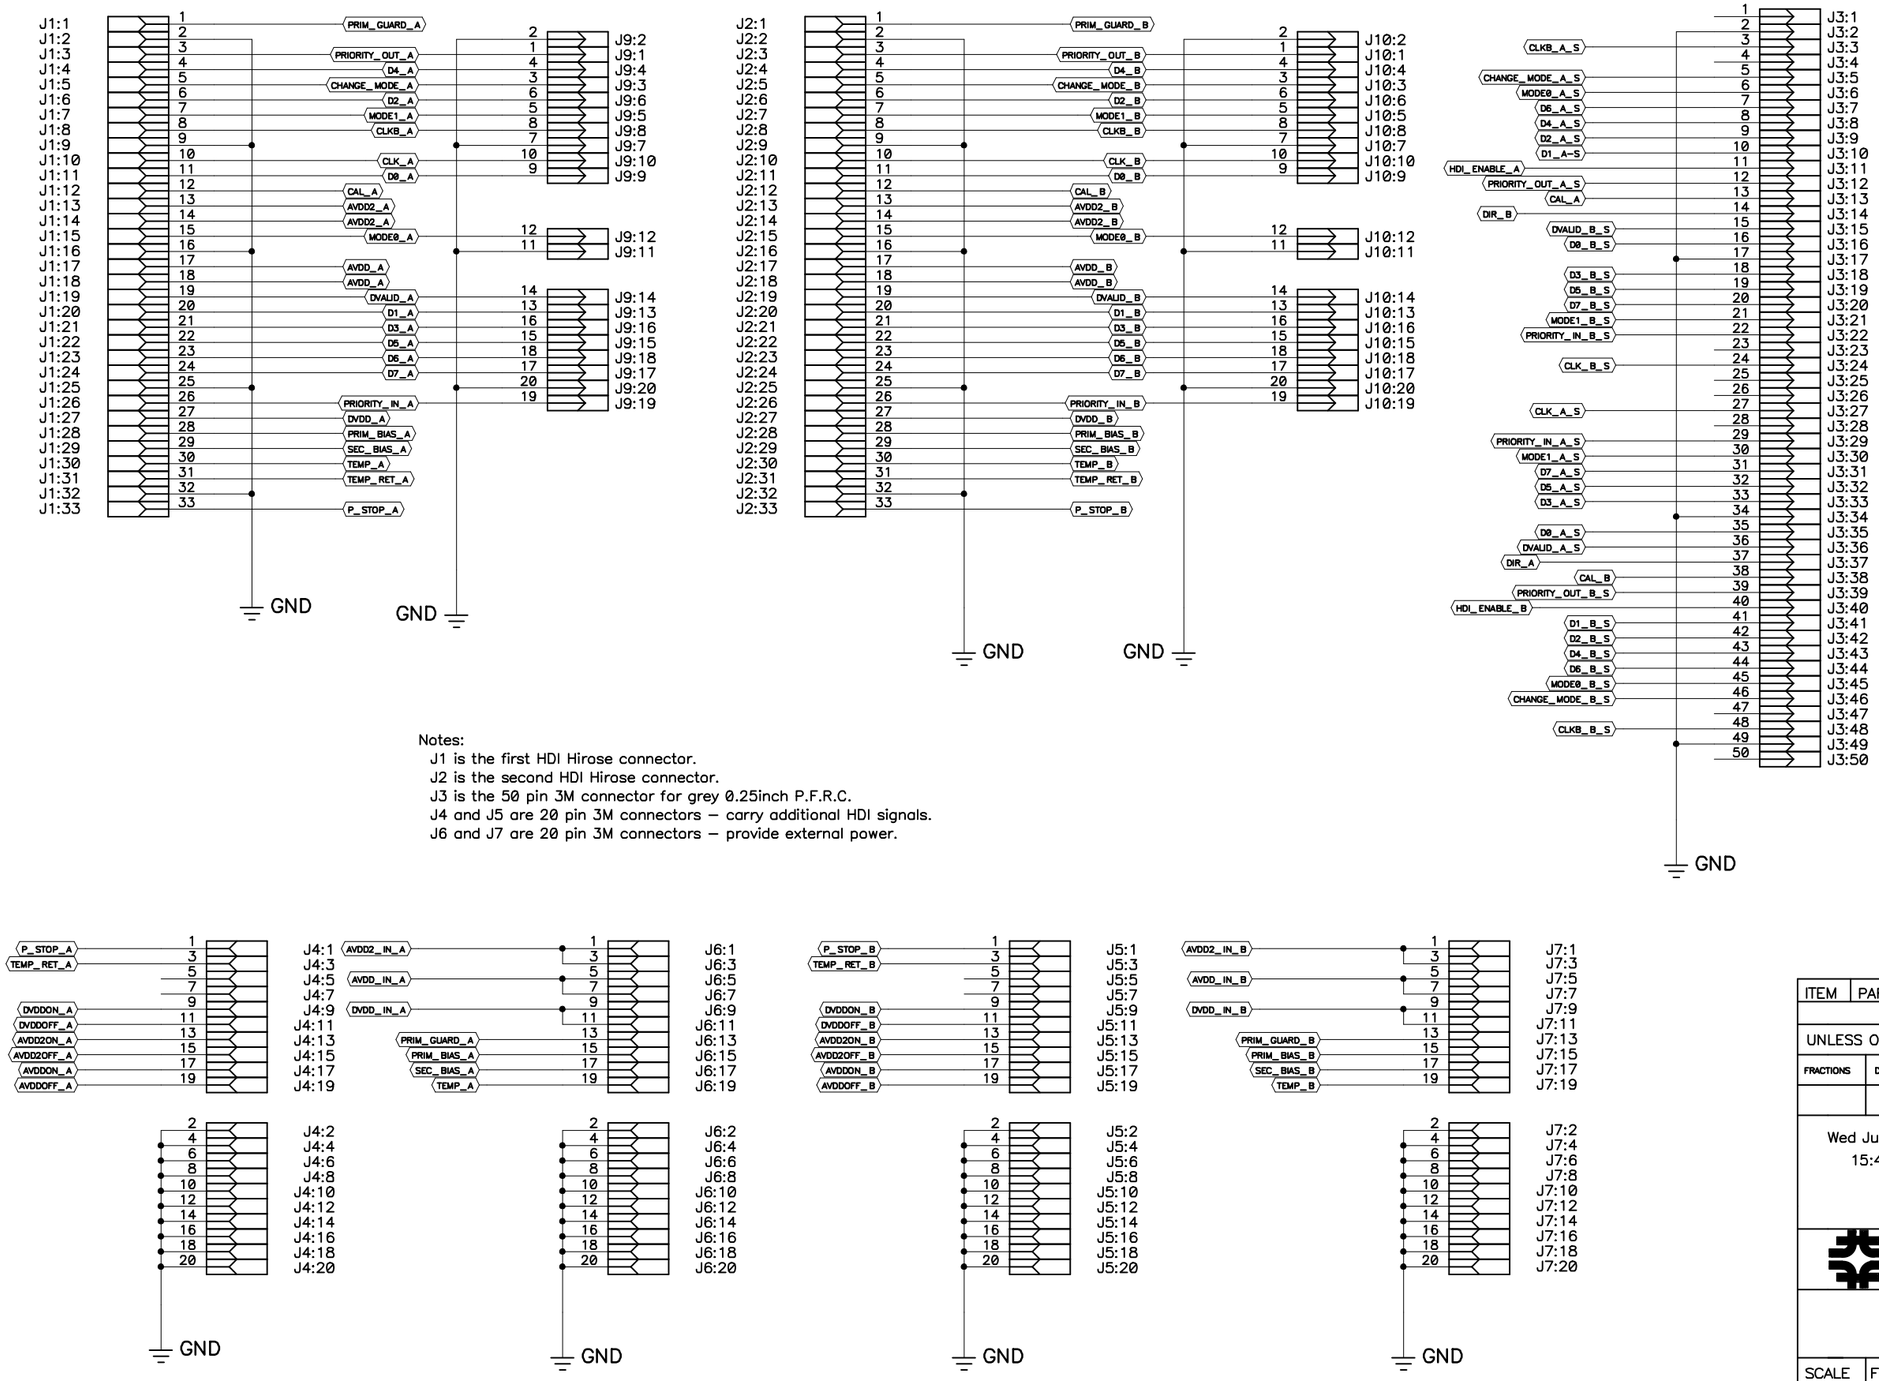

Notes:
J1 is the first HDI Hirose connector.
J2 is the second HDI Hirose connector.
J3 is the 50 pin 3M connector for grey 0.25inch P.F.R.C.
J4 and J5 are 20 pin 3M connectors – carry additional HDI signals.
J6 and J7 are 20 pin 3M connectors – provide external power.

ITEM	PART NUMBER	DESCRIPTION OR SIZE	QTY
PARTS LIST			

UNLESS OTHERWISE SPEC.			ORIGINATOR	M. Matulik	02/10/98
FRACTIONS	DECIMALS	ANGLES	DRAWN	M. Matulik	11/25/96
			CHECKED		
Wed Jul 29 1998 15:42:33			APPROVED		
			USED ON	D0 Silicon Vertex Detector	
			MATERIAL		

FERMI NATIONAL ACCELERATOR LABORATORY
UNITED STATES DEPT. OF ENERGY

Interface Module Prototype

SCALE	FILMED	DRAWING NUMBER	Sheet 1 of 5	REV.
		3823.112-EB-330109		D